



Models and Ratings Chart

Model*	Voltage	Max. Current	Total Power	Load Regulation	Line Regulation	Ripple & Noise (P-P)	Efficiency Level
PEAD36B-10-B2	5V	4.00A	20W	+/-5%	+/-1%	100mV	VI
PEAD36B-11-B2	9V	3.00A	27W	+/-5%	+/-1%	250mV	VI
PEAD36B-12-B2	12V	3.00A	36W	+/-5%	+/-1%	250mV	VI
PEAD36B-13-B2	15V	2.0A	30W	+/-5%	+/-1%	250mV	VI
PEAD36B-13-1-B2	18V	1.66A	30W	+/-5%	+/-1%	350mV	VI
PEAD36B-13-2-B2	19V	1.58A	30W	+/-5%	+/-1%	350mV	VI
PEAD36B-14-B2	24V	1.5A	36W	+/-5%	+/-1%	350mV	VI
PEAD36B-17-B2	36V	0.83A	30W	+/-5%	+/-1%	480mV	VI
PEAD36B-18-B2	48V	0.625A	30W	+/-5%	+/-1%	480mV	VI


*C14 standard input receptacle

For C6 input receptacle, model numbers are PEAD36BS. For example, PEAD36BS-12-B2

For C8 input receptacle, model numbers are PEAD36BSF. For example, PEAD36BSF-12-B2

For C18 input receptacle, model numbers are PEAD36BF. For example, PEAD36BF-12-B2

Mechanical Outline

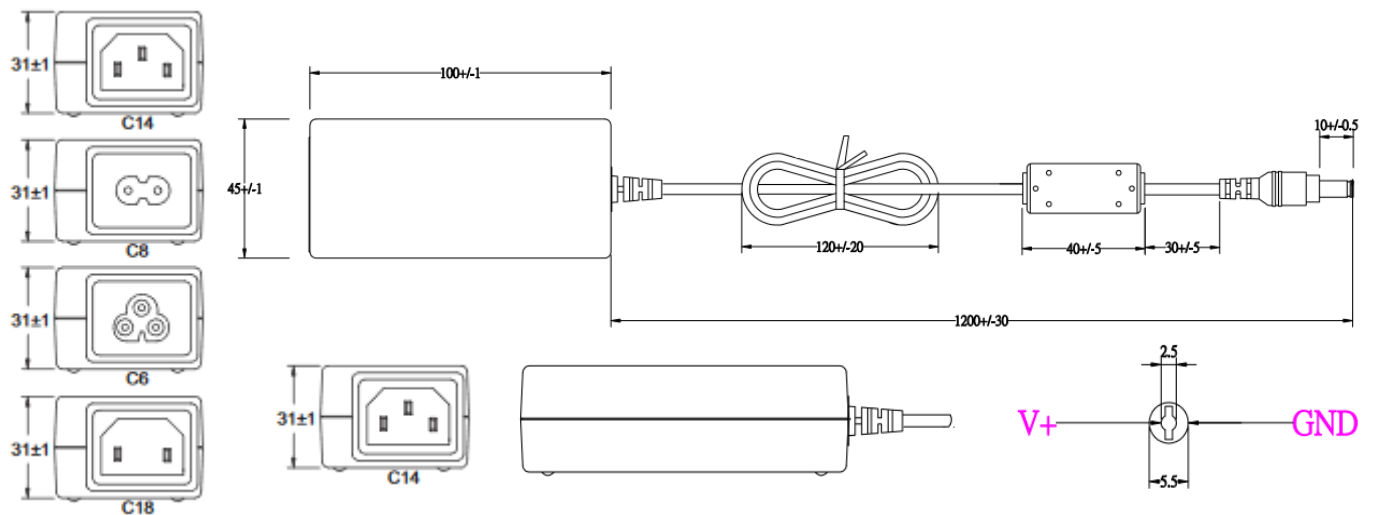

Output Return Connected to Earth Ground on Class I Models